


7678800003

High Current PDU Fuses or Breakers

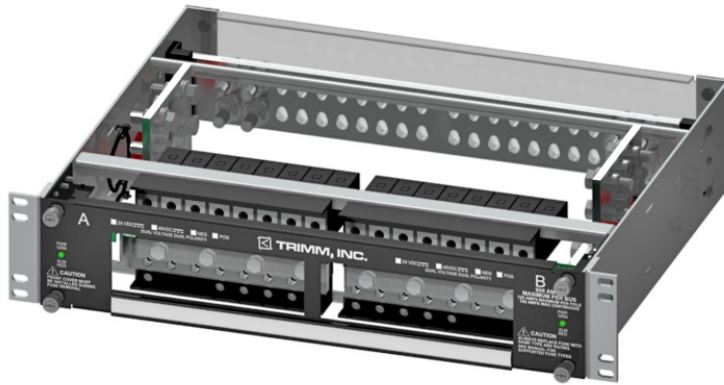


Positions Per Bus
8 Versa-Slots

Max Per Position
125 Amps

Bus Capacity
600 Amps

GENERAL		CONNECTIONS		
Dimensions	19.00" W x 3.50" H x 14.500" D	Input	2 Hole Lug Bat - 3/8" stud x 1" spacing, Rtn - 3/8" stud x 1" spacing or 1/4" stud x 5/8" spacing	
Rack Space	2U	Wire Range	Up to 750 kcmil (x2)	
Weight	18.5 lbs.	Max. Terminal Width	2.000"	
Mounting	19" WECCO/EIA	Tightening Torque	150 in-lb (16.9 Nm)	
Mtg. Pos.	Flush, 4" or 5" Offset	Output	2 Hole Lug Battery - 1/4" stud x 5/8" spacing, Return - 1/4" stud x 5/8" spacing or 3/8" stud x 1" spacing	
Finish	Black Textured Powder Coat w/zinc mtg	Wire Range	Up to 2/0 AWG	
ELECTRICAL		Max. Terminal Width	0.625"	
Input	Nominal Voltage	-/+24-48V DC	Tightening Torque	24 in-lb (2.7 Nm)
	Voltage Range	-/+19-60V DC	Ground Bus	2 Hole Lug 1/4" stud x 5/8" spacing
	Number of Buses	2	Wire Range	Up to 4/0 AWG
	Intr. Device Rating	750 Amps	ENVIRONMENT	
Output	Max Rating by Type	*TPS Fuse - 70 Amp *TLS Fuse - 125 Amp *TPC Fuse - 125 Amp *Must purchase Fuse Holder Single Pole Breaker - 100A Dual Pole Breaker - 150A	Short Term Op Temp	-5° C to +55° C
	Continous Load Rating	TLS Fuse - 100 Amp TPC Fuse - 100 Amp TPS Fuse - 56 Amp Single Pole Breaker - 80A Dual Pole Breaker - 120A	Ambient	Up to 50° C
ALARMING		Store Temp	-40° C to +70° C	
Indicators	Bi-color LED Green (Power) Red (Alarm)	Humidity	0 to 95% non-condensing	
Function	Form C relay contacts for remote fuse and power fail indication	Power Dissipation	130.8 Watts max	
Conn. Type	Solderless Wire Wrap (18 to 30 AWG)	STANDARDS		
Rating	DC 30W/AC 50VA	Safety (Recognized)	UL 60950-1/UL 1801/CSA C22.2 No.60950-1/EN 60950-1/IEC 60950-1	
		Telcordia	NEBS Level 3 (GR-63/GR-1089)	

High Current Power Distribution Unit, 8/8 Versa-Slots, 19" W 7678800003

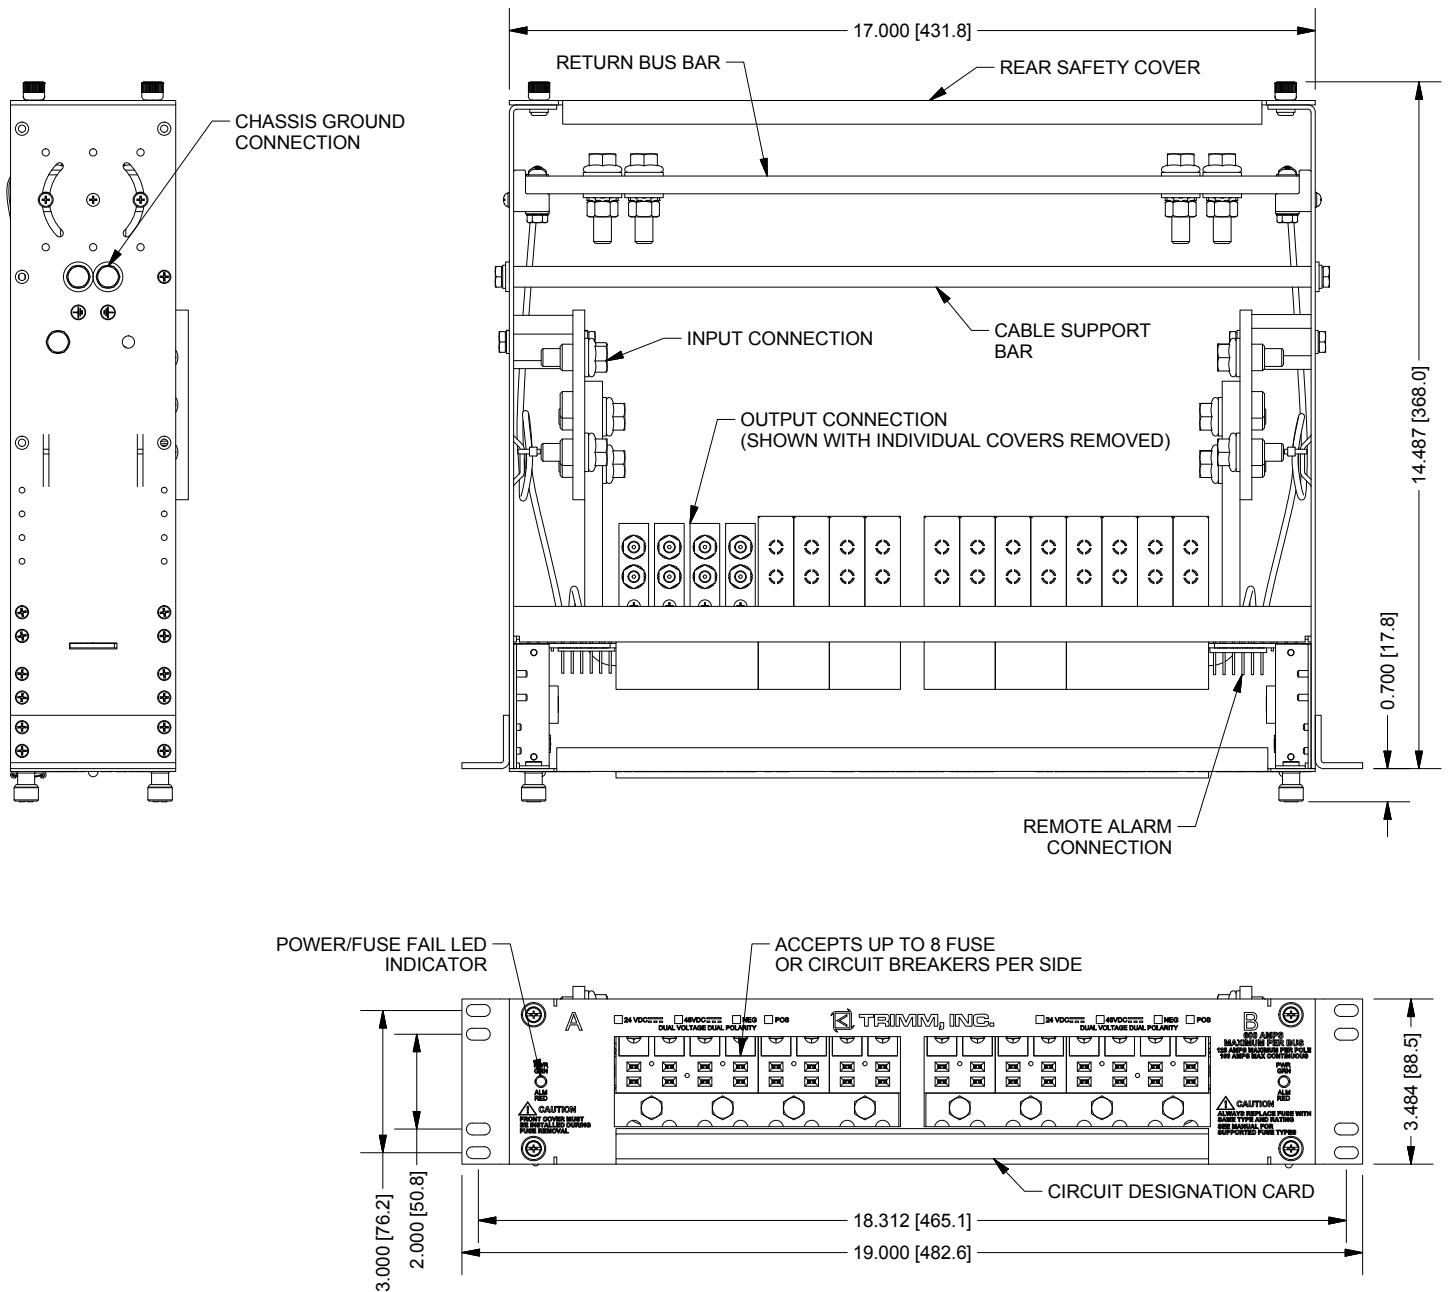

NOTES

Go to www.trimminc.com for a complete list of the fuses and circuit breakers that can be used in this panel. If you order TLS, TPS or TPC fuses with this panel, you will also need to order a fused disconnect for each fuse.