


# 7671100001

## High Current PDU Fuses or Breakers

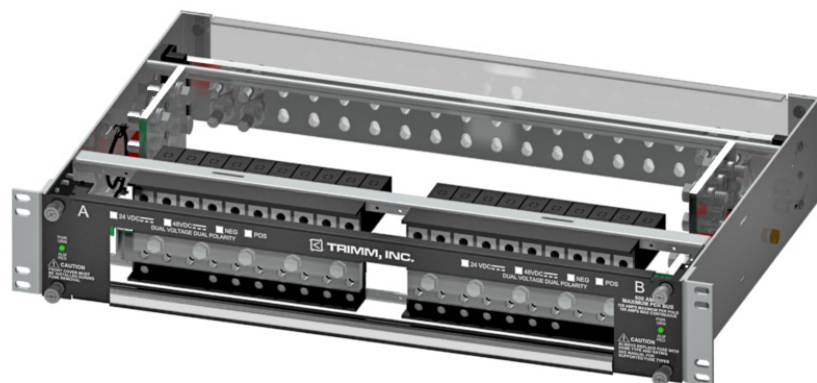

Positions Per Bus  
10 Versa-Slots

Max Per Position  
125 Amps

Bus Capacity  
600 Amps

### GENERAL

Dimensions	23.00" W x 3.50" H x 14.500" D
Rack Space	2U
Weight	20.0 lbs.
Mounting	23" WECCO/EIA
Mtg. Pos.	Flush, 4" or 5" Offset
Finish	Black Textured Powder Coat w/zinc mtg

### ELECTRICAL

Input	Nominal Voltage	-/+24-48V DC
	Voltage Range	-/+19-60V DC
	Number of Buses	2
	Intr. Device Rating	750 Amps
Output	Max Rating by Type	*TPS Fuse - 70 Amp *TLS Fuse - 125 Amp *TPC Fuse - 125 Amp *Must purchase Fuse Holder Single Pole Breaker - 100A Dual Pole Breaker - 150A
	Continous Load Rating	TLS Fuse - 100 Amp TPC Fuse - 100 Amp TPS Fuse - 56 Amp Single Pole Breaker - 80A Dual Pole Breaker - 120A

### ALARMING

Indicators	Bi-color LED Green (Power) Red (Alarm)
Function	Form C relay contacts for remote fuse and power fail indication
Conn. Type	Solderless Wire Wrap (18 to 30 AWG)
Rating	DC 30W/AC 50VA

### CONNECTIONS

Input	2 Hole Lug	Bat - 3/8" stud x 1" spacing, Rtn - 3/8" stud x 1" spacing or 1/4" stud x 5/8" spacing
	Wire Range	Up to 750 kcmil (x2)
	Max. Terminal Width	2.000"
	Tightening Torque	150 in-lb (16.9 Nm)
Output	2 Hole Lug	Bat - 1/4" stud x 5/8" spacing Rtn - 1/4" stud x 5/8" spacing or 3/8" stud x 1" spacing
	Wire Range	Up to 2/0 AWG
	Max. Terminal Width	0.625"
	Tightening Torque	24 in-lb (2.7 Nm)
Ground Bus	2 Hole Lug	1/4" stud x 5/8" spacing
	Wire Range	Up to 4/0 AWG

### ENVIRONMENT


Short Term Op Temp	-5° C to +55° C
Ambient	Up to 50° C
Store Temp	-40° C to +70° C
Humidity	0 to 95% non-condensing
Power Dissipation	130.8 Watts max

### STANDARDS

Safety (Recognized)	UL 60950-1/UL 1801/CSA C22.2 No.60950-1/EN 60950-1/IEC 60950-1
Telcordia	NEBS Level 3 (GR-63/GR-1089)

# High Current Power Distribution Unit, 10/10 Versa-Slots

## 7671100001

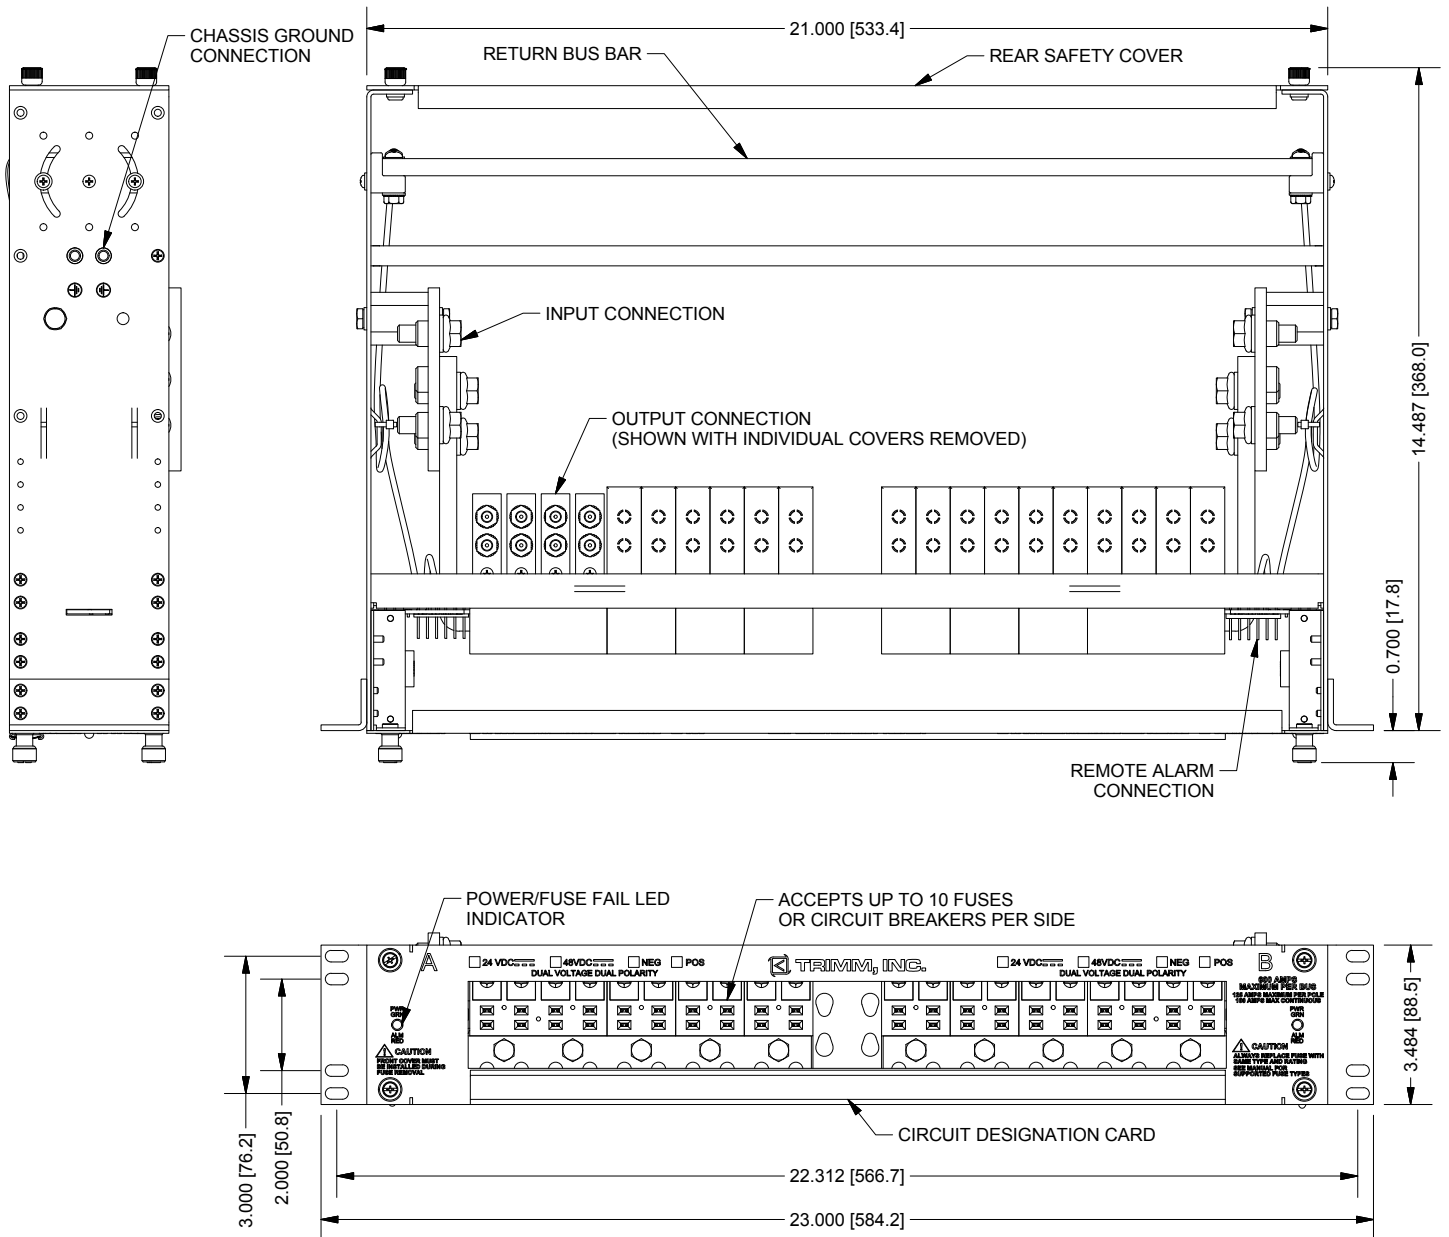

### NOTES

Go to [www.trimminc.com](http://www.trimminc.com) to order the fuses or breakers for this panel. If you order TLS, TPS or TPC fuses with this panel, you will also need to order a fused disconnect for each fuse.