

7471111002

GMT Fuse Panel 2U

Total Front Access



Positions Per Bus
10


Max Per Position
15 Amps

Bus Capacity
100 Amps

GENERAL		
Dimensions	19.00" W x 3.50" H x 6.625" D	
Rack Space	2U	
Weight	4.5 lbs.	
Mounting	Universal 19", 23", or Wall-Mountable, WECCO/EIA	
Mtg. Pos.	Front or Rear Flush, 2.835" Offset	
Finish	Black Textured Powder Coat	
ELECTRICAL		
Input	Nominal Voltage	-/+12-24V DC
	Voltage Range	-/+10-30V DC
	Number of Buses	2
	Intr. Device Rating	125 Amps
Output	Max Fuse Rating	15 Amp
	Continuous Load Rating	10.5 Amps
ALARMING		
Indicators	Green (Power)/Red (Alarm)	
Function	Form C relay contacts for remote fuse fail indication	
Conn. Type	Set Screw (12 to 22 AWG)	
Rating	DC 30W/AC 50VA	

CONNECTIONS		
Input	2 Hole Lug	1/4" stud x 5/8" spacing
	Wire Range	Up to 2/0 AWG
	Max. Terminal Width	0.640"
	Tightening Torque	40 in-lb (4.5 Nm)
Output	Connection Type	Set Screw Output
	Wire Range	12 to 22 AWG
	Max. Terminal Width	No Terminals Required
Ground Bus	Tightening Torque	5 in-lb (.5 Nm)
	2 Hole Lug	1/4" stud x 1" spacing
Wire Range	6 AWG lug supplied with panel	
	ENVIRONMENT	
Short Term Op Temp	-5° C to +55° C	
Ambient	Up to 50° C	
Store Temp	-40° C to +70° C	
Humidity	0 to 95% non-condensing	
Power Dissipation	32.6 Watts max	
STANDARDS		
Safety (Listed)	UL 60950-1/UL 1801/CSA C22.2 No.60950-1/EN 60950-1/IEC 60950-1	
Telcordia	NEBS Level 3 (GR-63/GR-1089)	

Front Access 10/10 GMT Fuse Panel, Stud Input, Set Screw Out 7471111002

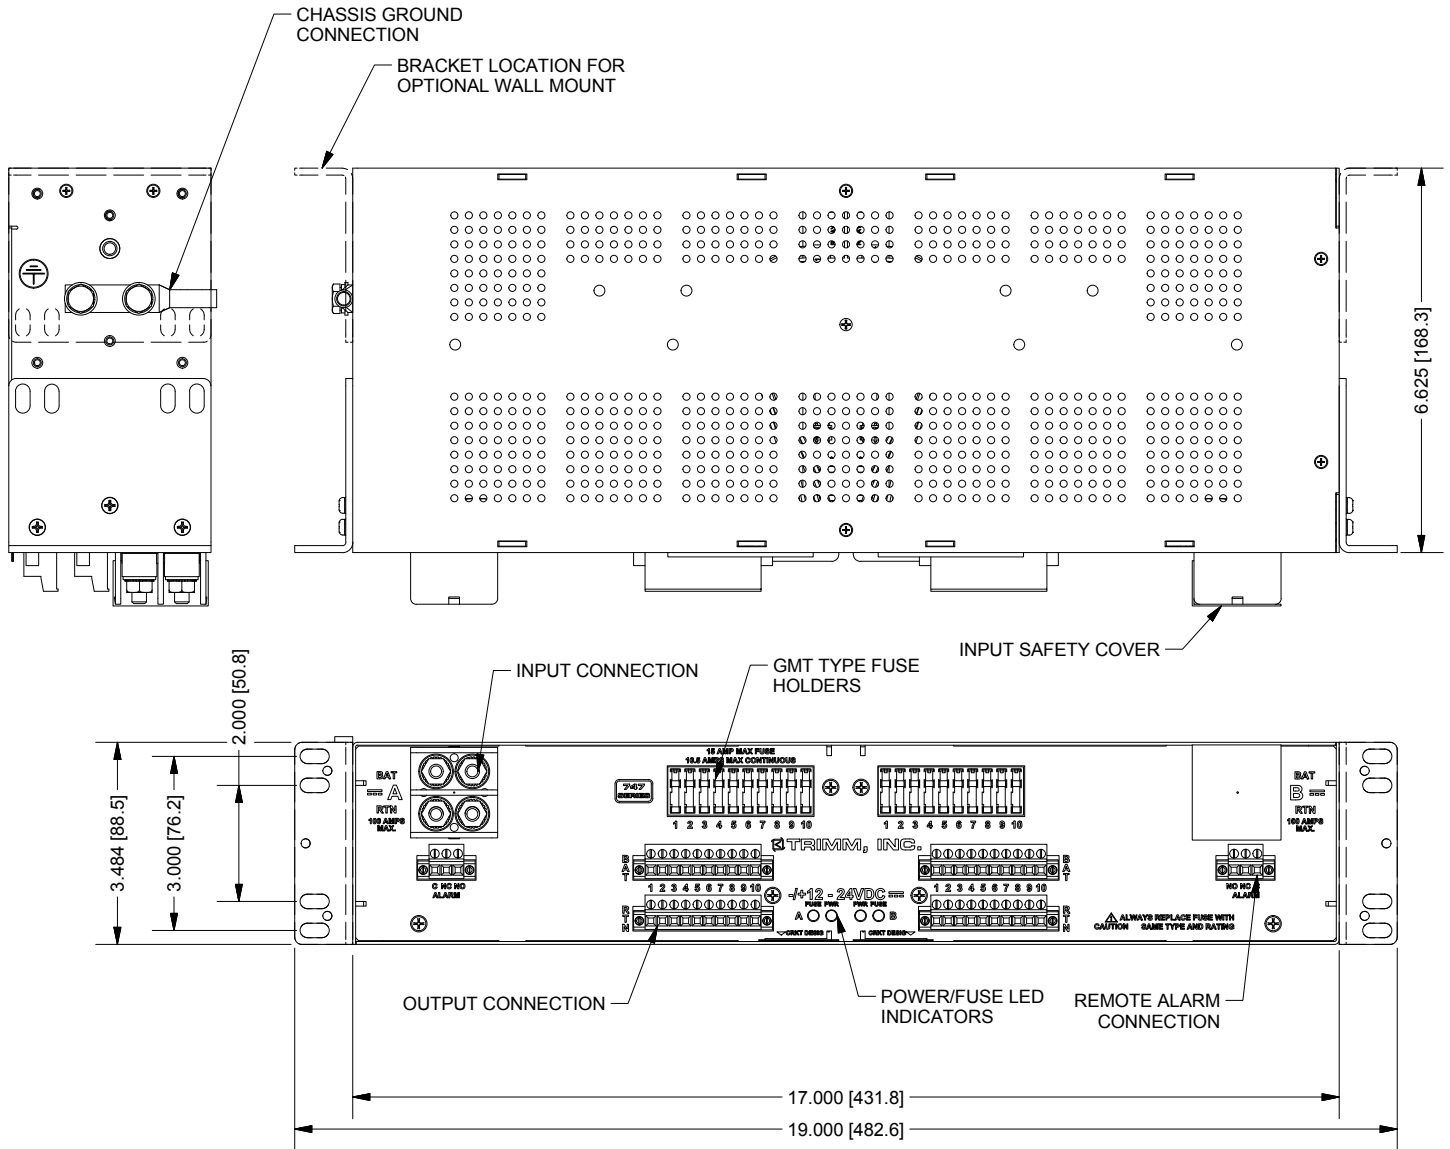

NOTES

Go to www.trimm-inc.com for a complete list of the fuses to order with this panel.