

7471111003

GMT Fuse Panel 2U

Total Front Access



Positions Per Bus
10

Max Per Position
15 Amps

Bus Capacity
100 Amps

GENERAL

Dimensions	19.00" W x 3.50" H x 6.625" D
Rack Space	2U
Weight	4.5 lbs.
Mounting	Universal 19", 23", or Wall-Mountable, WECCO/EIA
Mtg. Pos.	Front or Rear Flush, 2.835" Offset
Finish	Black Textured Powder Coat

ELECTRICAL

Input	Nominal Voltage	-/+5-12V DC
	Voltage Range	-/+4-15V DC
	Number of Buses	2
	Intr. Device Rating	125 Amps
Output	Max Fuse Rating	15 Amp
	Continuous Load Rating	10.5 Amps

ALARMING

Indicators	Green (Power)/Red (Alarm)
Function	Form C relay contacts for remote fuse fail indication
Conn. Type	Set Screw (12 to 22 AWG)
Rating	DC 30W/AC 50VA

CONNECTIONS

Input	2 Hole Lug	1/4" stud x 5/8" spacing
	Wire Range	Up to 2/0 AWG
	Max. Terminal Width	0.640"
	Tightening Torque	40 in-lb (4.5 Nm)
Output	Connection Type	Set Screw Output
	Wire Range	12 to 22 AWG
	Max. Terminal Width	No Terminals Required
Ground Bus	Tightening Torque	5 in-lb (.5 Nm)
	2 Hole Lug	1/4" stud x 1" spacing
Wire Range	6 AWG lug supplied with panel	

ENVIRONMENT


Short Term Op Temp	-5° C to +55° C
Ambient	Up to 50° C
Store Temp	-40° C to +70° C
Humidity	0 to 95% non-condensing
Power Dissipation	32.6 Watts max

STANDARDS

Safety <small>(Listed)</small>	UL 60950-1/UL 1801/CSA C22.2 No.60950-1/EN 60950-1/IEC 60950-1
Telcordia	NEBS Level 3 (GR-63/GR-1089)

Front Access 10/10 GMT Fuse Panel, Stud Input, Set Screw Out

7471111003

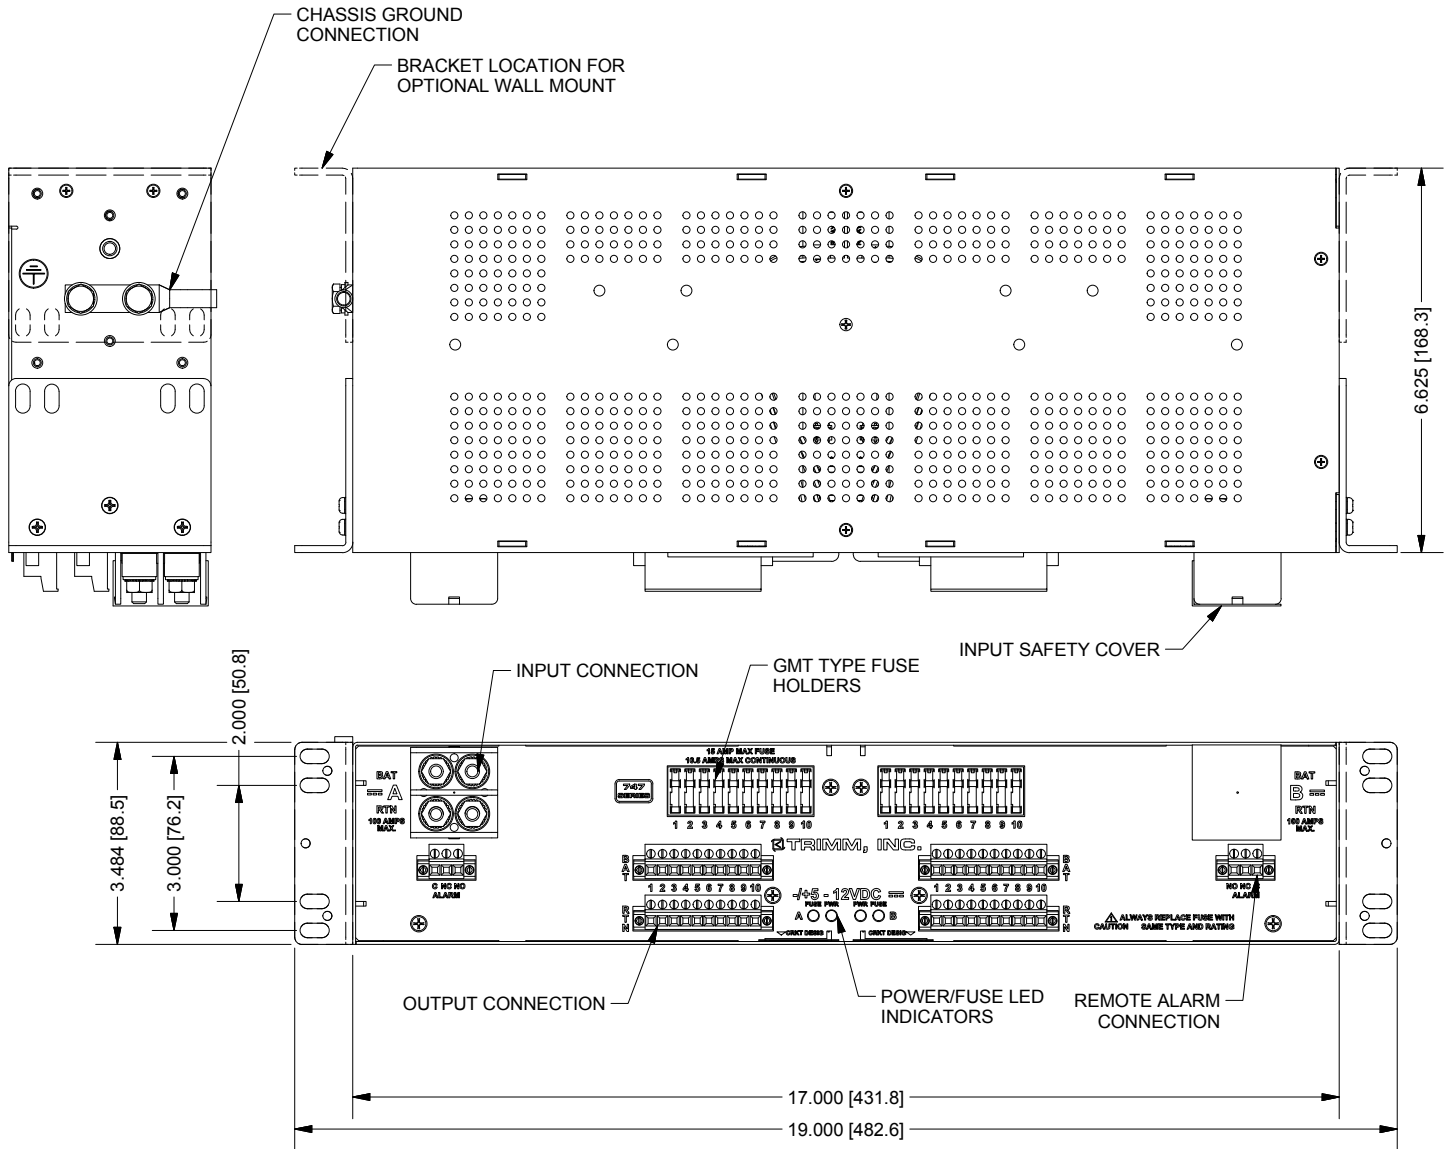

NOTES

Go to www.trimm-inc.com for a complete list of the fuses to order with this panel.