

7473121032

OSP GMT Fuse Panel Wall Mounted



Positions Per Panel
10

Max Per Position
15 Amps

Bus Capacity
100 Amps

GENERAL

| | |
|------------|---|
| Dimensions | 5.50" w/ Input Cover W x 3.38" H x 1.340" D |
| Rack Space | Wall Mount |
| Weight | 1.0 lbs. |
| Mounting | Wall Mount |
| Mtg. Pos. | Flush |
| Finish | Zinc Plating |

ELECTRICAL

| | | |
|--------|------------------------|--------------|
| Input | Nominal Voltage | -/+12-24V DC |
| | Voltage Range | -/+10-30V DC |
| | Number of Buses | 1 |
| | Intr. Device Rating | 125 Amps |
| Output | Max Fuse Rating | 15 Amp |
| | Continuous Load Rating | 10.5 Amps |

ALARMING

| | |
|------------|---|
| Indicators | No LED's |
| Function | Form C relay contacts for remote fuse fail indication |
| Conn. Type | Set Screw (12 to 22 AWG) |
| Rating | DC 30W/AC 50VA |

CONNECTIONS

| | | |
|------------|---------------------|-----------------------------|
| Input | 2 Hole Lug | 1/4" stud x 5/8" spacing |
| | Wire Range | Up to 2 AWG |
| | Max. Terminal Width | 0.625" |
| | Tightening Torque | 24 in-lb (2.7 Nm) |
| Output | Connection Type | Set Screw Output |
| | Wire Range | 12 to 22 AWG |
| | Max. Terminal Width | No Terminals Required |
| | Tightening Torque | 5 in-lb (.5 Nm) |
| Ground Bus | Type | Ground to mounting hardware |
| | Wire Range | Up to 6 AWG |

ENVIRONMENT


| | |
|--------------------|-------------------------|
| Short Term Op Temp | -40° C to +70° C |
| Ambient | Up to 65° C |
| Store Temp | -40° C to +70° C |
| Humidity | 0 to 95% non-condensing |
| Power Dissipation | 12.9 Watts max |

STANDARDS

| | |
|---------------------|---|
| Safety (Recognized) | UL 60950-1/UL 1801/CSA C22.2 No.60950-1/EN 60950-1/IEC 60950-1 |
| Telcordia | NEBS Level 3 (GR-63/GR-1089) and GR-3108 Class 3 (w/o salt fog testing) |

Wall Mounted 10 Pos. GMT Fuse Panel, Stud In, Set Screw Out

7474111001

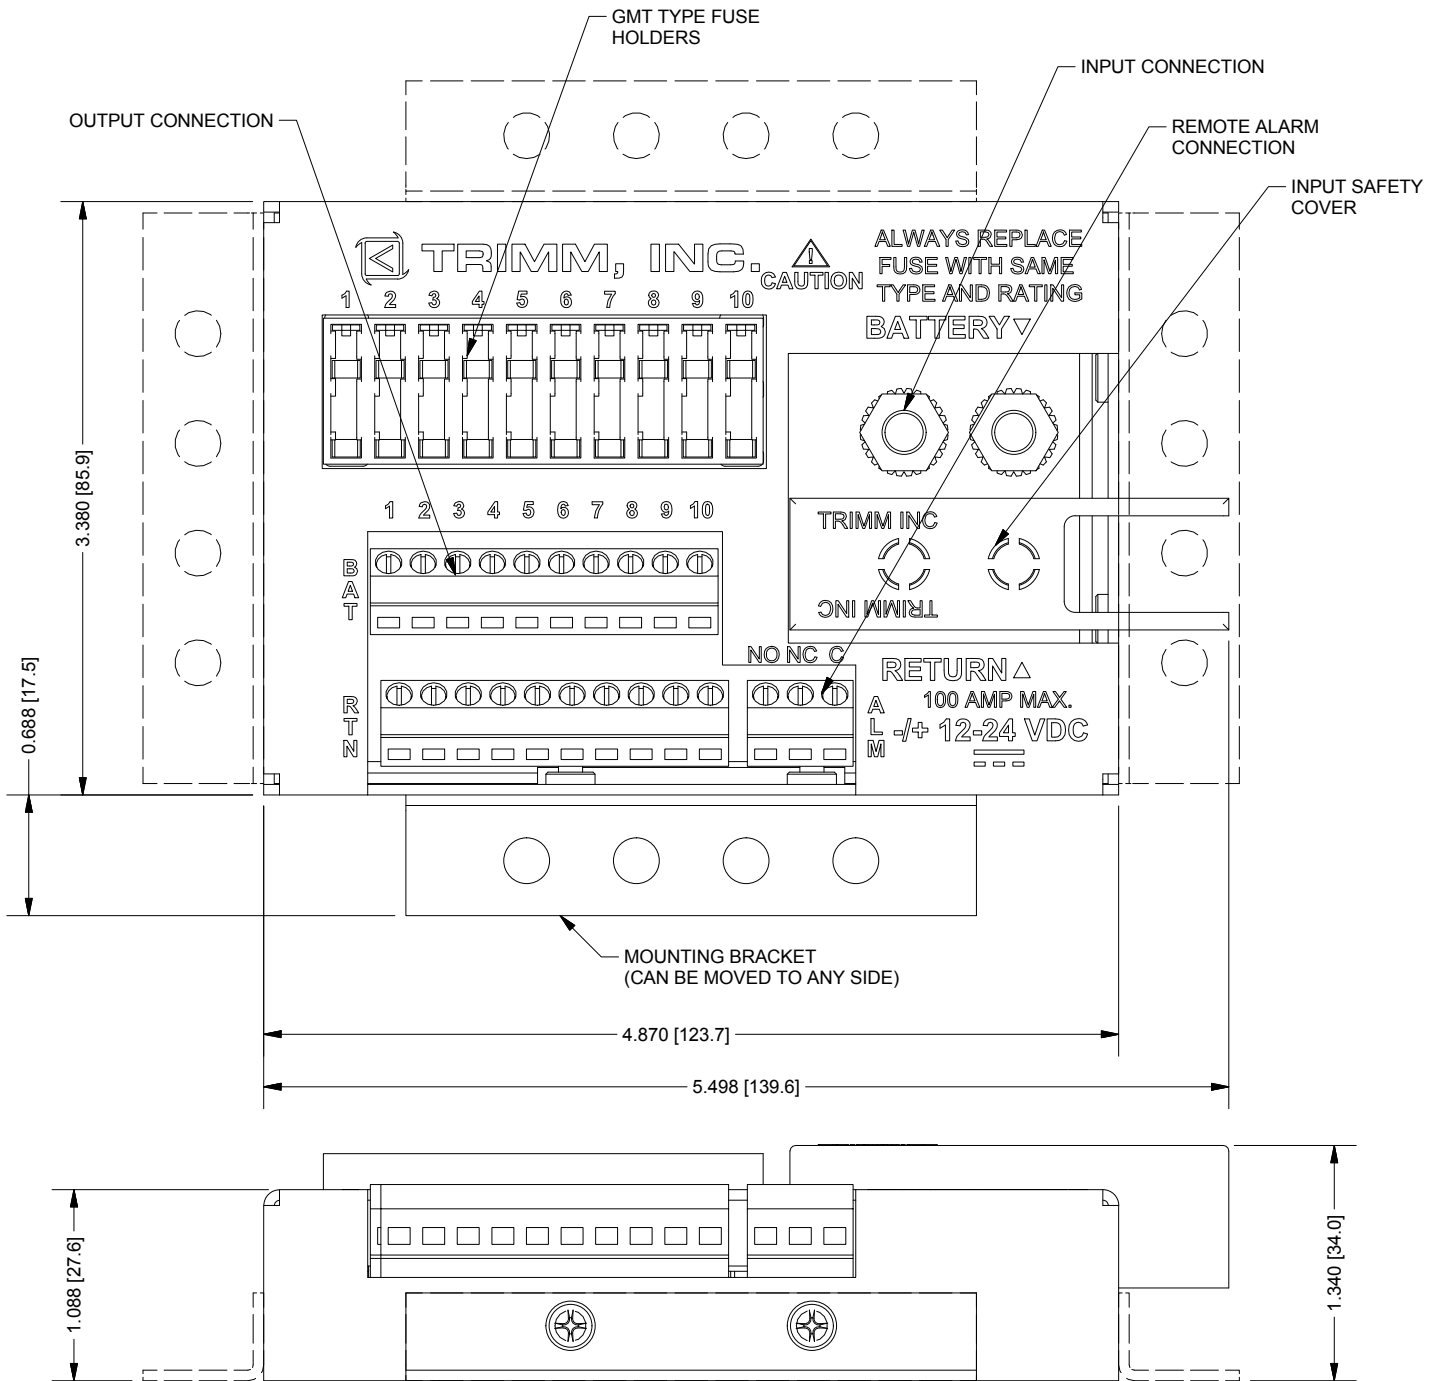

NOTES

This panel is perfect for Outside Plant applications because of the rigorous testing it has been subjected to. It is the only panel on the market certified for the extreme conditions found in the OSP environment. Go to www.trimminc.com for a complete list of the fuses to order with this panel.