

# 7571028002

## GMT Fuse Panel

### Optimum Value



Positions Per Panel  
**10**

Max Per Position  
**15 Amps**




Bus Capacity  
**80 Amps**

GENERAL	
Dimensions	19.00" W x 1.75" H x 2.000" D
Rack Space	1U
Weight	1.0 lbs.
Mounting	19" WECCO/EIA (23" brackets available)
Mtg. Pos.	Flush (Swing Hinges available)
Finish	Clear Anodized
ELECTRICAL	
Input	Nominal Voltage -/+12-24V DC
	Voltage Range -/+10-30V DC
	Number of Buses 1
	Intr. Device Rating 100 Amps
Output	Max Fuse Rating 15 Amp
	Continuous Load Rating 10.5 Amps
ALARMING	
Indicators	Bi-color LED Green (Power) Red (Alarm)
Function	Form C relay contacts for remote fuse fail indication
Conn. Type	Set Screw (12 to 22 AWG)
Rating	DC 30W/AC 50VA

CONNECTIONS		
Input	2 Hole Lug	1/4" stud x 5/8" spacing
	Wire Range	Up to 2/0 AWG
	Max. Terminal Width	0.625"
	Tightening Torque	24 in-lb (2.7 Nm)
Output	Connection Type	Set Screw Output
	Wire Range	12 to 22 AWG
	Max. Terminal Width	No Terminals Required
	Tightening Torque	5 in-lb (.5 Nm)
Ground Bus	2 Hole Lug	1/4" stud x 5/8" spacing
	Wire Range	8 AWG lug supplied with panel
ENVIRONMENT		
Short Term Op Temp	-40° C to +70° C	
Ambient	Up to 65° C	
Store Temp	-40° C to +70° C	
Humidity	0 to 95% non-condensing	
Power Dissipation	11.84 Watts max	
STANDARDS		
Safety (Recognized)	UL 60950-1/UL 1801/CSA C22.2 No.60950-1/EN 60950-1/IEC 60950-1	
Telcordia	NEBS Level 3 (GR-63/GR-1089) and GR-3108 Class 3 (w/o salt fog testing)	

# 10 Position, 0V GMT Fuse Panel, Stud Input, Set Screw Output

## 7571028002

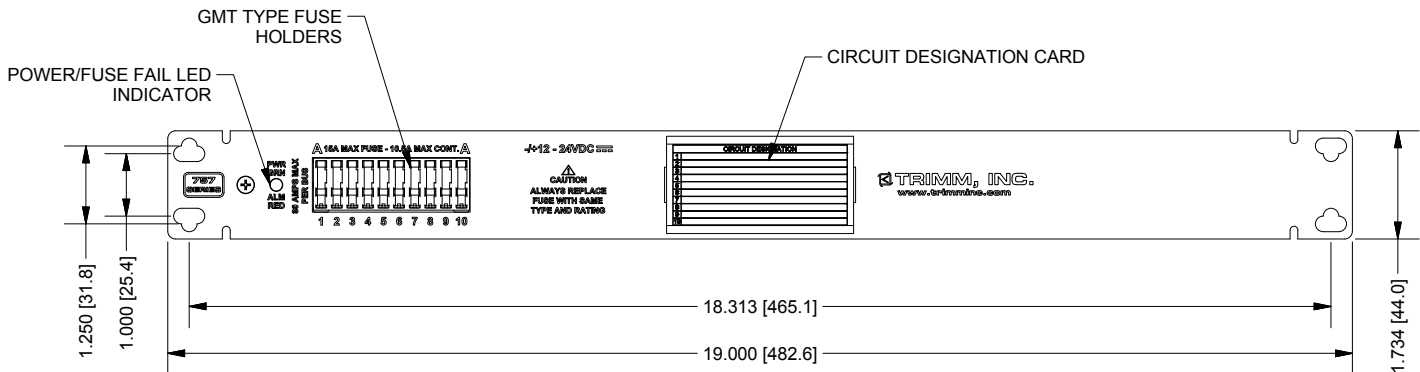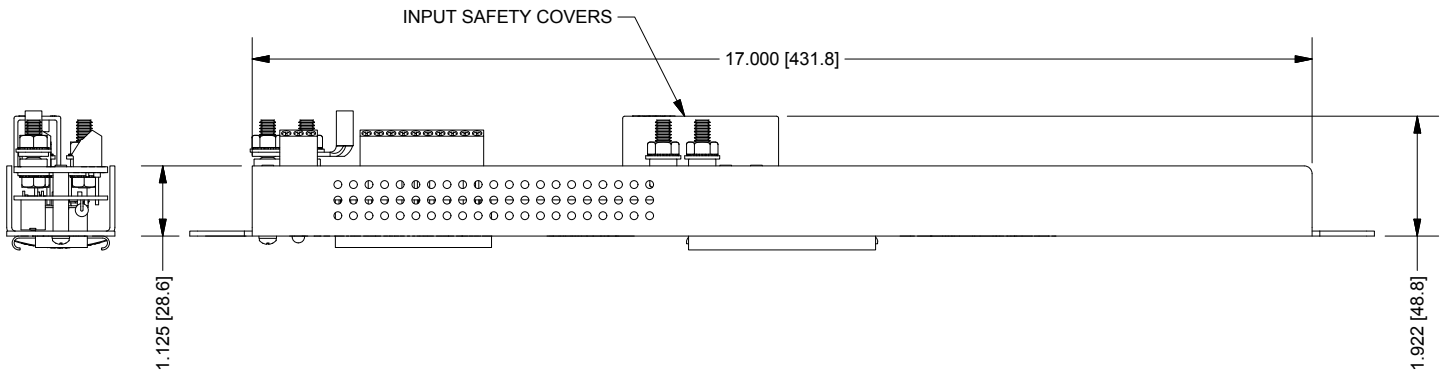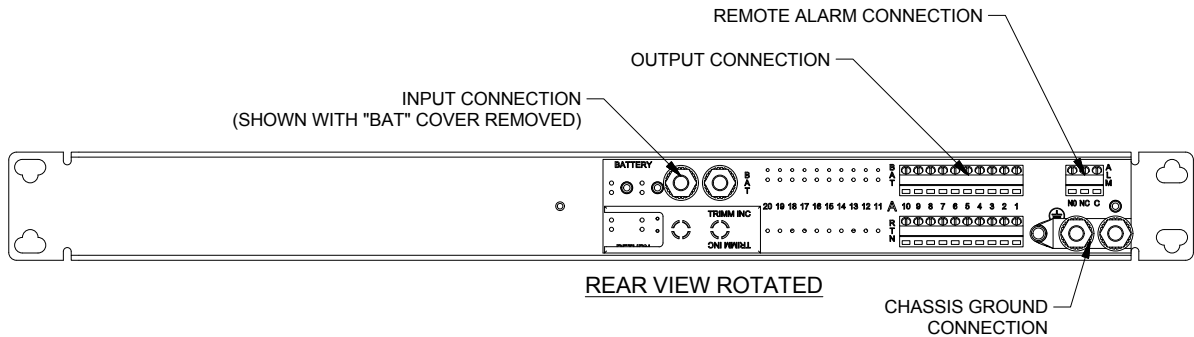

### NOTES

Go to [www.trimminc.com](http://www.trimminc.com) for a complete list of the fuses to order with this panel.