


7571030002

GMT Fuse Panel

Optimum Value

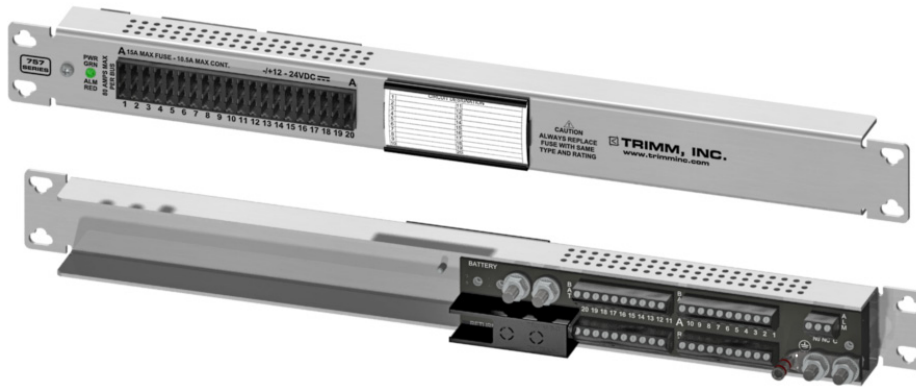

Positions Per Panel
20

Max Per Position
15 Amps




Bus Capacity
80 Amps

GENERAL		
Dimensions	19.00" W x 1.75" H x 2.000" D	
Rack Space	1U	
Weight	1.0 lbs.	
Mounting	19" WECCO/EIA (23" brackets available)	
Mtg. Pos.	Flush (Swing Hinges available)	
Finish	Clear Anodized	
ELECTRICAL		
Input	Nominal Voltage	-/+12-24V DC
	Voltage Range	-/+10-30V DC
	Number of Buses	1
	Intr. Device Rating	100 Amps
Output	Max Fuse Rating	15 Amp
	Continuous Load Rating	10.5 Amps
ALARMING		
Indicators	Bi-color LED Green (Power) Red (Alarm)	
Function	Form C relay contacts for remote fuse fail indication	
Conn. Type	Set Screw (12 to 22 AWG)	
Rating	DC 30W/AC 50VA	

CONNECTIONS		
Input	2 Hole Lug	1/4" stud x 5/8" spacing
	Wire Range	Up to 2/0 AWG
	Max. Terminal Width	0.625"
	Tightening Torque	24 in-lb (2.7 Nm)
Output	Connection Type	Set Screw Output
	Wire Range	12 to 22 AWG
	Max. Terminal Width	No Terminals Required
	Tightening Torque	5 in-lb (.5 Nm)
Ground Bus	2 Hole Lug	1/4" stud x 5/8" spacing
	Wire Range	8 AWG lug supplied with panel
ENVIRONMENT		
Short Term Op Temp	-40° C to +70° C	
Ambient	Up to 65° C	
Store Temp	-40° C to +70° C	
Humidity	0 to 95% non-condensing	
Power Dissipation	11.84 Watts max	
STANDARDS		
Safety (Recognized)	UL 60950-1/UL 1801/CSA C22.2 No.60950-1/EN 60950-1/IEC 60950-1	
Telcordia	NEBS Level 3 (GR-63/GR-1089) and GR-3108 Class 3 (w/o salt fog testing)	

20 Position, 0V GMT Fuse Panel, Stud Input, Set Screw Output

7571030002

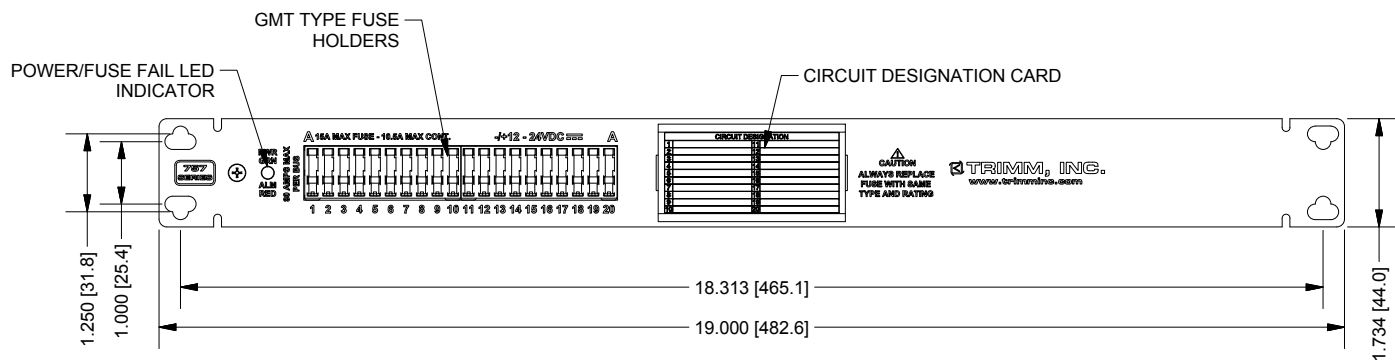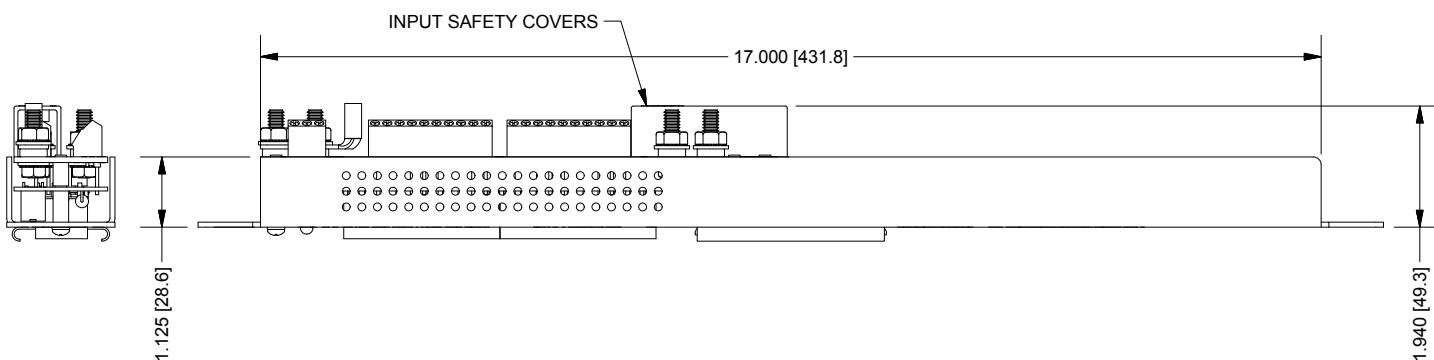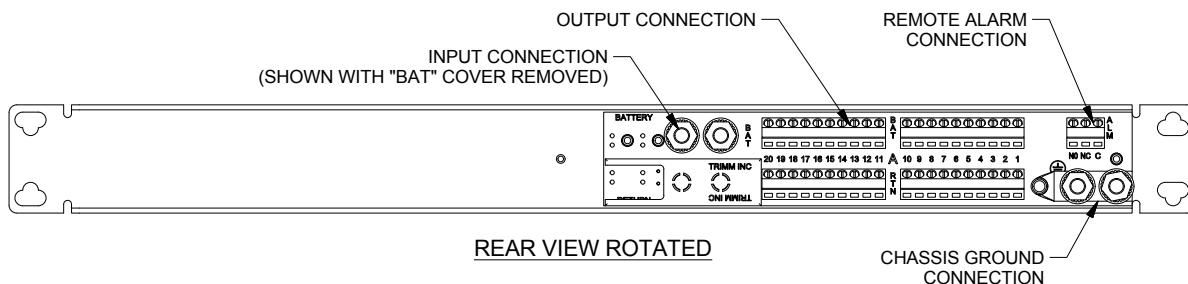

NOTES

Go to www.trimm-inc.com for a complete list of the fuses to order with this panel.