

7571048103

GMT Fuse Panel

Optimum Value 20A



Positions Per Panel
10

Max Per Position
20 Amps




Bus Capacity
100 Amps

GENERAL		
Dimensions	19.00" W x 1.75" H x 2.000" D	
Rack Space	1U	
Weight	1.0 lbs.	
Mounting	19" WECCO/EIA (23" brackets available)	
Mtg. Pos.	Flush (Swing Hinges available)	
Finish	Black Anodized	
ELECTRICAL		
Input	Nominal Voltage	-/+5-12V DC
	Voltage Range	-/+4-15V DC
	Number of Buses	1
	Intr. Device Rating	125 Amps
Output	Max Fuse Rating	20 Amp
	Continuous Load Rating	16 Amps
ALARMING		
Indicators	Bi-color LED Green (Power) Red (Alarm)	
Function	Form C relay contacts for remote fuse and power fail indication	
Conn. Type	Solderless Wire Wrap (18 to 30 AWG)	
Rating	DC 30W/AC 50VA	

CONNECTIONS		
Input	2 Hole Lug	1/4" stud x 5/8" spacing
	Wire Range	Up to 2/0 AWG
	Max. Terminal Width	0.625"
	Tightening Torque	24 in-lb (2.7 Nm)
Output	Barrier Strip Output	#6 Sems Screw for Terminals
	Wire Range	10 to 22 AWG
	Max. Terminal Width	0.325"
Ground Bus	2 Hole Lug	1/4" stud x 5/8" spacing
	Wire Range	6 AWG lug supplied with panel
ENVIRONMENT		
Short Term Op Temp	-40° C to +70° C	
Ambient	Up to 65° C	
Store Temp	-40° C to +70° C	
Humidity	0 to 95% non-condensing	
Power Dissipation	16.4 Watts max	
STANDARDS		
Safety (Recognized)	UL 60950-1/UL 1801/CSA C22.2 No.60950-1/EN 60950-1/IEC 60950-1	
Telcordia	NEBS Level 3 (GR-63/GR-1089) and GR-3108 Class 3 (w/o salt fog testing)	

10 Position, 20 Amp OV GMT Fuse Panel, Stud In, Barrier Out

7571048103

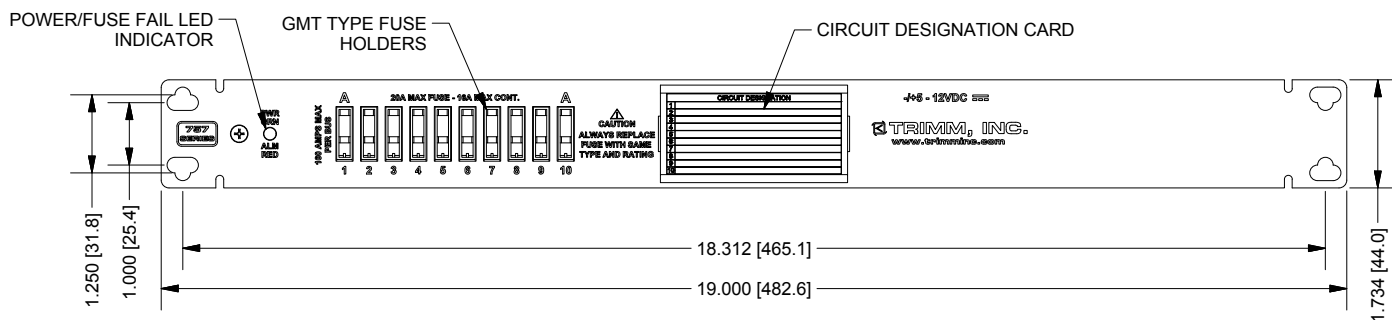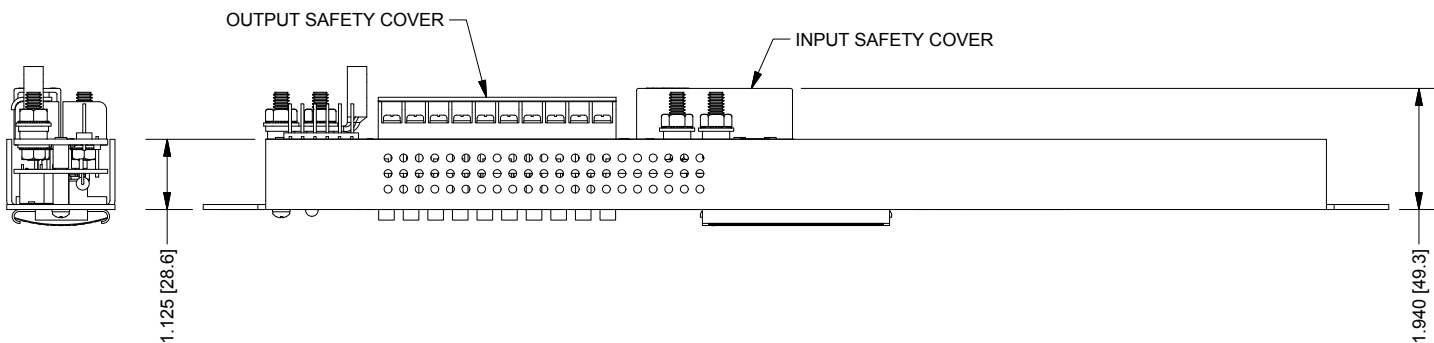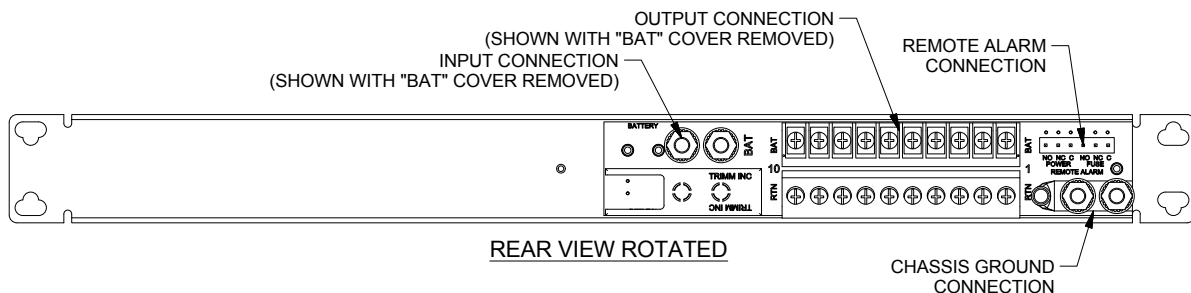

NOTES

Go to www.trimm-inc.com for a complete list of the fuses to order with this panel.