


9276001001

6 Pos Demarc Panel w/ GMT Fuse Panel

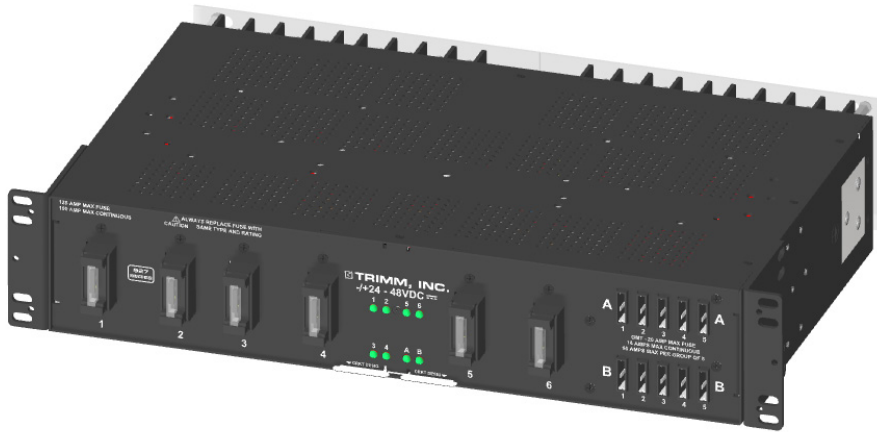

Positions Per Panel
6 Demarcs - 5/5 GMT

Max Per Position
125A Demarc
20A GMT

Bus Capacities
125A Demarcation
65A GMT

GENERAL		
Dimensions	19.00" W x 3.50" H x 11.125" D	
Rack Space	2U	
Weight	12.0 lbs.	
Mounting	Universal 19" or 23", WECO or EIA	
Mtg. Pos.	Flush, 3" or 4" Offset	
Finish	Black Textured Powder Coat	
ELECTRICAL		
Input	Nominal Voltage	-/+24-48V DC
	Voltage Range	-/+19-60V DC
	Number of Buses	8 (6 Demarc, 2 GMT)
	Intr. Device Rating	Demarc 125A - 80A GMT
Output	Max Fuse Rating	TLS Fuse - 125 Amp TPS Fuse - 70 Amp GMT Fuse - 20 Amp
	Continous Load Rating	TLS Fuse - 100 Amps TPS Fuse - 56 Amps GMT Fuse - 16 Amps
ALARMING		
Indicators	Bi-color LED Green (Power) Red (Alarm)	
Function	Form C relay contacts for remote fuse fail indication	
Conn. Type	Solderless Wire Wrap (18 to 30 AWG)	
Rating	DC 30W/AC 50VA	


CONNECTIONS		
Input	2 Hole Lug	1/4" stud x 5/8" spacing
	Wire Range	Up to 2/0 AWG
	Max. Terminal Width	0.640"
	Tightening Torque	40 in-lb (4.5 Nm)
Output	Demarc - 2 Hole Lug	1/4" stud x 5/8" spacing
	GMT - Barrier Strip	#6 Sems Screw
	Wire Range	Demarc - Up to 2/0 AWG GMT - 10 to 22 AWG
	Max. Terminal Width	Demarc - 0.640" GMT - 0.312"
Tightening Torque	Demarc - 40 in-lb	GMT - 10 in-lb
	Ground Bus	2 Hole Lug
Wire Range	6 AWG lug supplied with panel	

ENVIRONMENT	
Short Term Op Temp	-40° C to +70° C
Ambient	Up to 65° C
Store Temp	-40° C to +70° C
Humidity	0 to 95% non-condensing
Dissipation	104 Watts max

STANDARDS	
Safety <small>(Listed)</small>	UL 60950-1/UL 1801/CSA C22.2 No.60950-1/EN 60950-1/IEC 60950-2
Telcordia	NEBS Level 3 (GR-63/GR-1089) and GR-3108 Class 3 (w/o salt fog testing)

Combination GMT Demarc Panel, 6 TFD Demarc, 5A/5B GMT

9276001001

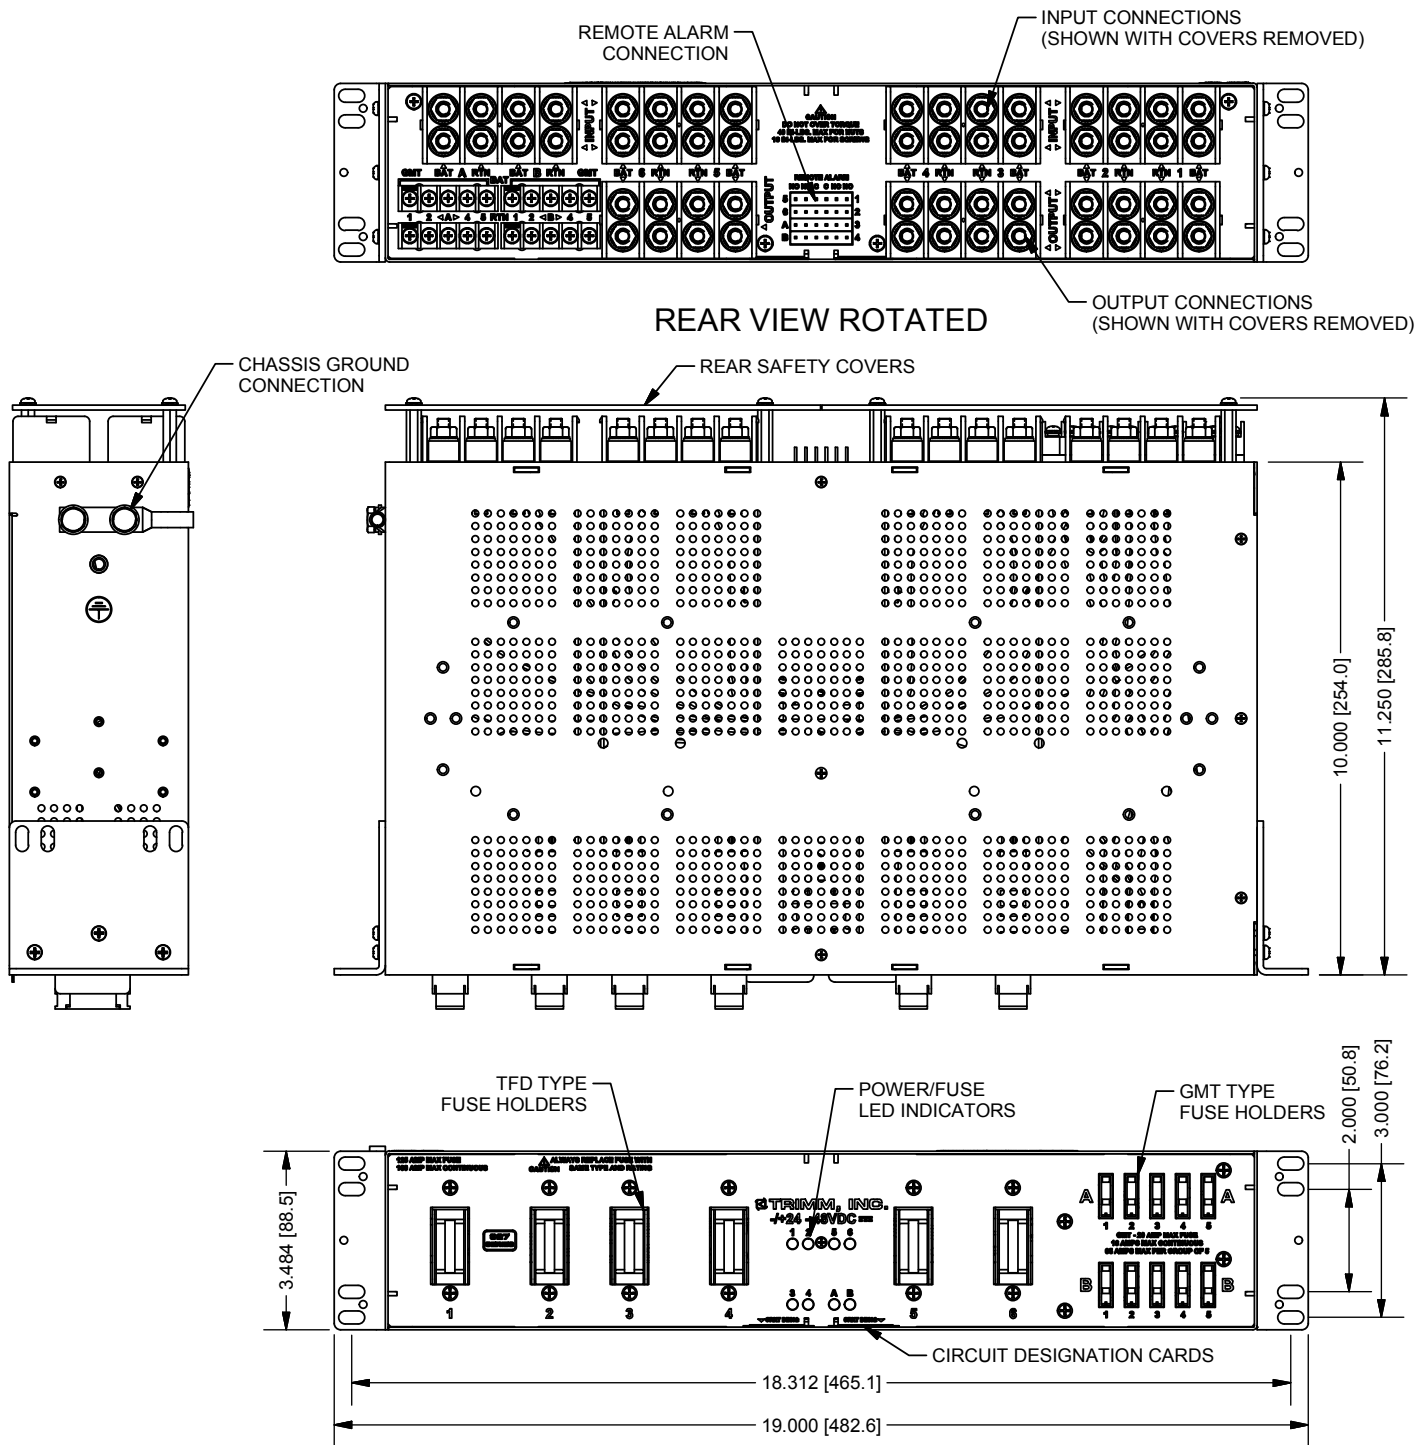

NOTES

Go to www.trimm-inc.com for a complete list of the fuses to order with this panel.