



REAR VIEW ROTATED

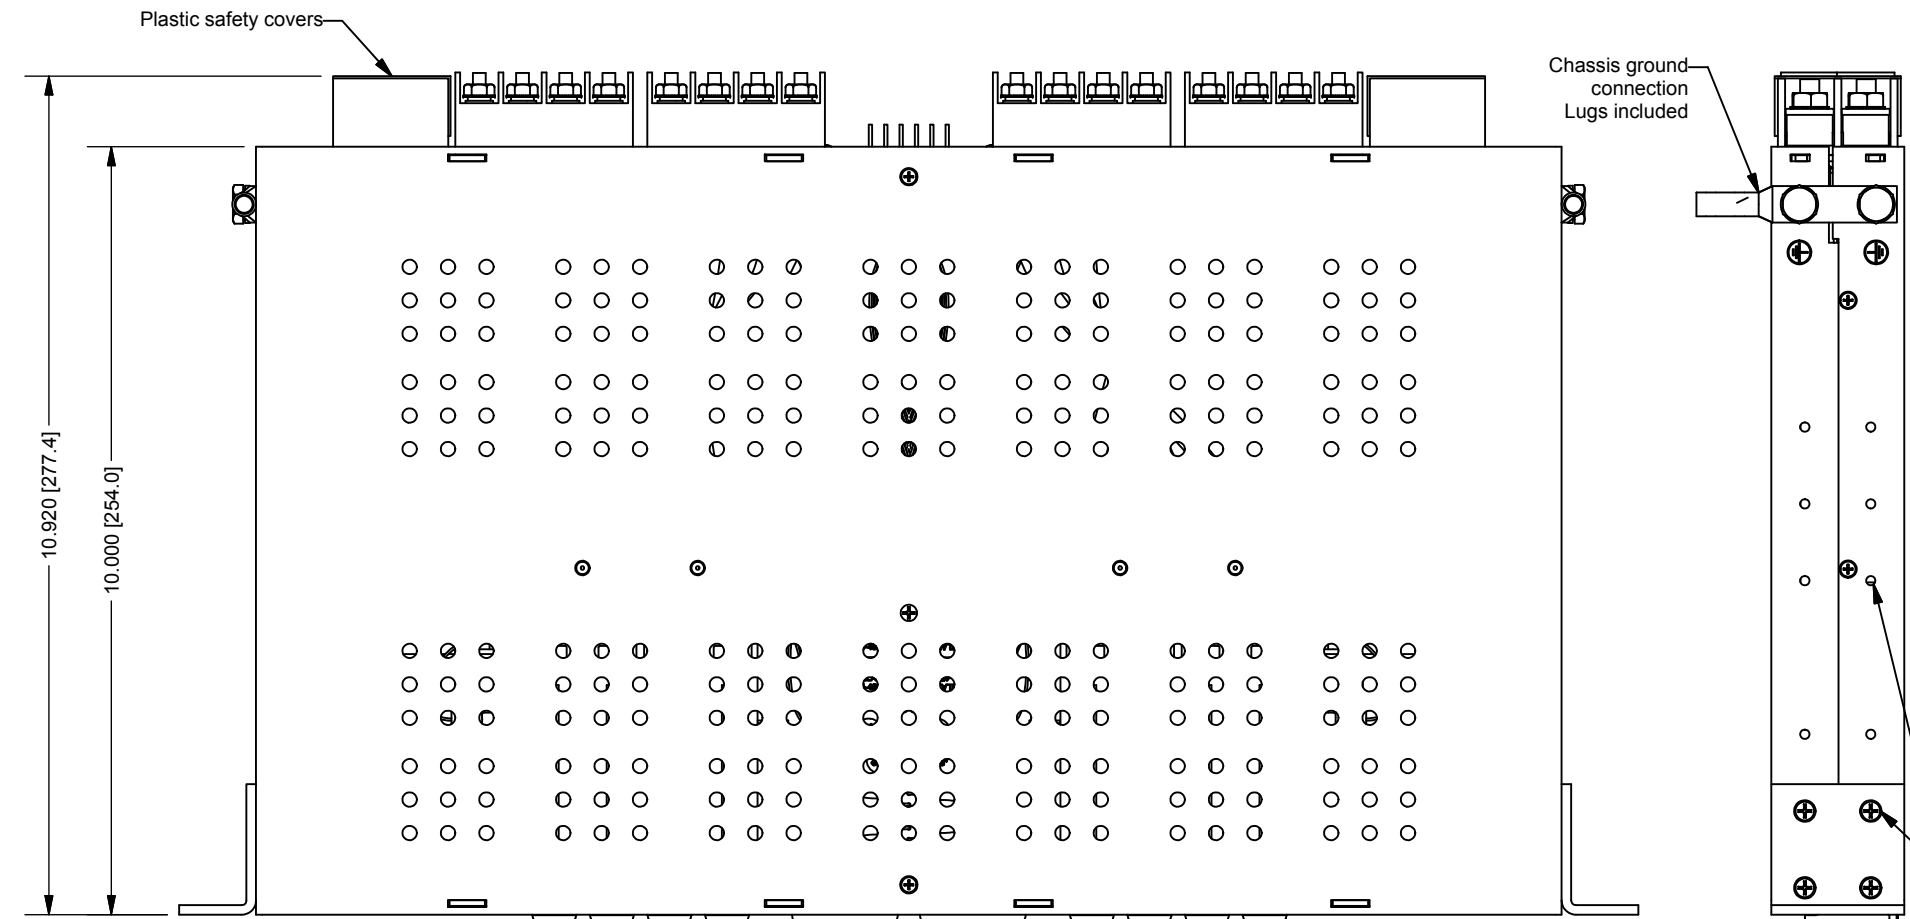

Product Specifications: 7371101001 4/4 TPA PANEL			
<b>Mechanical</b>	Dimensions	19" W x 1.734" H x 11" D	
	Rack Spaces	1 (1U)	
	Weight	6 Lbs. approx.	
	Mounting	19" WECCO/EIA rack mount (23" adapters available)	
<b>Electrical</b>	Input	Voltage	-/+ 24 TO 48 VDC
		Number of Buses	2
		Current	150 Amps max per bus
		Interrupt Device Rating	187.5 Amps max.
	Output	Fuse Rating (TPA Type)	50 Amps max.
		Load Rating	40 Amps max. continuous
		Fuse Positions	4 positions per bus (8 Total)
		Earthing (Chassis GND)	2 Hole Compression Lugs
<b>Connections</b>	Input	Connection Type	2 Hole Compression Lugs
		Wire Range	1/4" stud x 5/8" center-center spacing
		Max. Terminal Width	.64" maximum
	Output	Connection Type	Barrier Strip
<b>Environment</b>	Output	Wire Range	Up to 6 AWG
		Max. Terminal Width	.500" maximum
	Earthing (Chassis GND)	Wire Range	6 Aw g. lugs provided (1 per bus)
		Short Term Operating Temperature	-5° C to +55° C
<b>Alarming</b>	Max. Recommended Ambient	Up to +50° C	
	Storage Temperature	-40° C to +70° C	
	Relative Humidity	0-95% noncondensing	
<b>Standards</b>	Indicators	Green (power) Red (alarm)	
	Alarm Capability	Form "C" contacts power and fuse failure	
	Connection Type	Wire wrap (18 to 30 Aw g)	
	Safety (UL)	UL 60950-1, UL 1801, CSA C22.2 No. 60950-1	
Telcordia (NEBS)		NEBS Level 3 Certified	
Whats included: 4 x #12-24 rack mounting screws, input/output connection fasteners, chassis ground connection hardware (bolts, lugs and locking washers).			

TPA FUSES	
PART NUMBER	FUSE AMPERAGE
7500192003	3 AMP
7500192005	5 AMP
7500192010	10 AMP
7500192015	15 AMP
7500192020	20 AMP
7500192025	25 AMP
7500192030	30 AMP
7500192040	40 AMP
7500192050	50 AMP

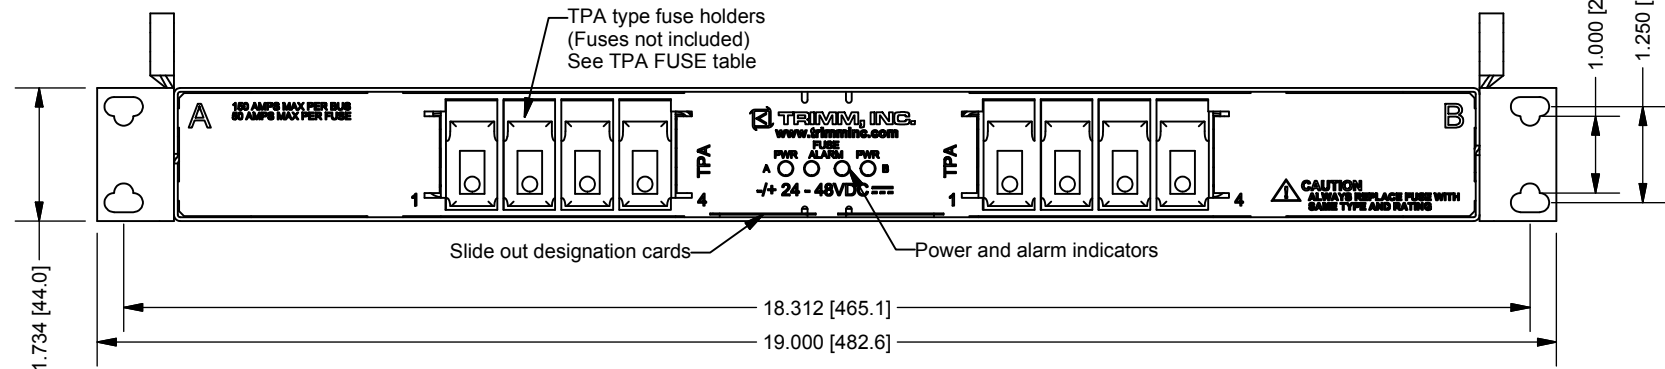

- Notes:
- 1-Dimensions are shown in inches [mm].
  - 2-Fuses are not included. See TPA Fuse table.
  - 3-#12-24 rack mounting screws, input connection fasteners, and chassis ground fasteners/lugs are provided with this panel.
  - 4-For 23" applications, order adapter kit part number 7500116741 (1 per panel).

The information on this document is proprietary information that is property of Trimm, inc. and shall not be reproduced or its contents disclosed in any manner whatsoever without the express written consent from Trimm, Inc. Due to continuous product development, specifications may change from those listed. Call Trimm, inc. for information

TOLERANCES: +/- .015 ON OVERALL PART SIZE, +/- .010 FROM ANY BEND TO THE CENTERLINE OF ANY HOLE OR CUTOUT, +/- .005 FROM CENTERLINE TO CENTERLINE ON ANY HOLE OR CUTOUT

APPROVED BY:	DRAWN BY: Brian Burch	DATE: 11/08/07	SIZE: <b>B</b>	DESCRIPTION: FUSE PANEL 4/4 TPA HSTUD IN/BAR.OUT +/-24 TO 48VDC 1U 19"	REV. <b>A</b>
			FILE CODE: 737m	DRAWING NUMBER: 7371101001m	PAGE: 1
			<b>TRIMM, INC.</b> 407 RAILROAD ST. BUTNER, NC. PHONE: 1-800-298-7466 FAX: 1-919-575-6200		