


Document INS-038017780X

This manual covers the following part numbers-Trimm 038017780X Family

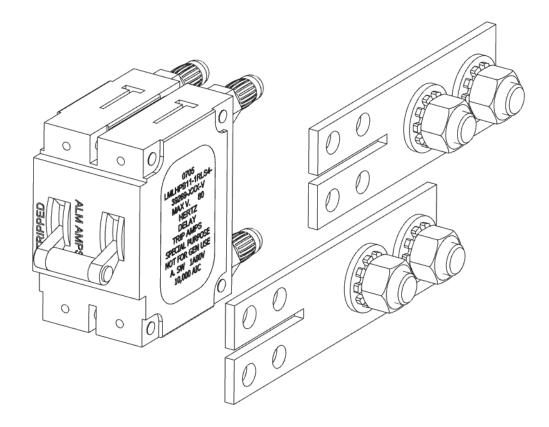

# **Section 1-Installation**

## 1.1 – Battery Adapter Installation

Place the longer bus bar adapter over the output "battery" connection and secure using 4 x  $\frac{1}{4}$ " flat washers and locking nuts supplied with the power distribution unit. Torque the fasteners to 40 in-lbs. maximum.

## 1.2 – Return Adapter Installation

Then place the shorter bus bar adapter over the output "return" connection and secure using  $4 \times \frac{1}{4}$ " flat washers and locking nuts supplied with the power distribution unit. Torque the fasteners to 40 in-lbs. maximum.

## 1.3 – Breaker Installation

Remove the faceplate from the front of the power distribution unit and plug the breaker into the applicable slot. *Note: Breakers should be installed with alarm terminal closest to outside edge of panel.* 

## 1.4 – Output Wire Installation

Apply output wire/terminals (battery connection first) to the bus bar adapters and secure using the 3/8" flat washers and locking nuts. Torque the nuts to 150 in-lbs. Use caution when applying torque to avoid unnecessary mechanical stress.

Section 2 - Revision Record						
Legend:	Туре	R=Revision T=Typo		A=Addition N=New	D=Deletion V=Review	
Revision	Date	Туре 🕄	Section/Comments			
A	10/17/15	N I	New Docume	ent		

